

ETX-202

Basic Ethernet Demarcation Device



Smart demarcation point between the service provider and customer networks

EtherAccess

- SLA monitoring to assure delivery of contracted Ethernet services
- VLAN bridging and stacking with P-bit, DSCP, Per Port, or ToS traffic prioritization
- Complete Ethernet OAM and Layer-2 loopback functionality for reduced Opex
- Network link protection based on 802.3ad or dual homing for increased service resiliency
- Up to two Gigabit Ethernet network ports and up to four Gigabit Ethernet user ports

ETX-202 is a carrier Ethernet demarcation device owned and operated by the service provider and installed at the customer premises.

Providing monitoring and diagnostic as well as QoS capabilities, ETX-202 focuses on the service and allows the service provider to achieve end to end rather than edge-to-edge service control.

IP address, IP mask, and default gateway can be automatically obtained using DHCP.

ETHERNET CAPABILITIES

ETX-202 features an internal bridge, operating in VLAN-aware or VLAN-unaware mode.

VLAN stacking can be used for traffic separation between different users or services by defining a Service VLAN ID per customer or service. When VLAN stacking is used, a Service VLAN tag is added to user traffic and removed from network traffic. Both Service VLAN ID and Service VLAN priority can be defined.



data communications
The Access Company

ETX-202

Basic Ethernet Demarcation Device

QOS

Different service types require different levels of QoS to be provided end-to-end. QoS can be defined per subscriber as well as per service. QoS has two aspects: rate limitation and traffic prioritization.

Hierarchical rate limitation defines peak traffic rate per user, port service, or per traffic aggregate. This maximizes bandwidth utilization.

For prioritizing user traffic, ETX-202 features up to four separate queues, which handle traffic with different service demands, such as real-time traffic, premium data, or best-effort data. In case of congestion, the relevant service receives higher priority at the customer premises.

Traffic can be classified dynamically and mapped to different priority queues according to VLAN priority, DSCP, Per Port, or ToS. Appropriate QoS can be achieved without customer marking, by mapping different services and different user ports (port-based priority).

MEF-9, MEF-14 CERTIFICATION

ETX-202 is certified by the Metro Ethernet Forum for EPL services (MEF-9, MEF-14).

ENVIRONMENT

ETX-202/H is a temperature-hardened version with matching SFPs intended for industrial installations.

TYPICAL APPLICATIONS

ETX-202 provides access to packet switched networks (Ethernet, IP/MPLS), as well as next-generation SDH/SONET backbones over Ethernet, using standard fiber optic interfaces. Access to legacy networks is possible when the edge devices include tributary Ethernet ports. The termination unit can be used for site-to-site connectivity (E-line), and for multiple site connectivity (E-LAN), depending on the network topology.

ETHERNET OAM

ETX-202 provides comprehensive Ethernet OAM capabilities:

- End-to-end (path) based on IEEE 802.1ag and Y.1731 for continuity check, non-intrusive loopback, and performance management, including Frame Delay, Frame Delay Variation, Frame Loss, Availability etc.
- Single segment (link) OAM according to IEEE 802.3ah for remote management and fault indication, including remote loopback, dying gasp, and MIB parameters retrieval
- Performance monitoring includes Frame Delay, Frame Delay Variation, Frame Loss and Availability.

NETWORK INTERFACE REDUNDANCY

The unit supports two redundancy modes:

- Link aggregation (1+1) based on IEEE 802.3ad
- Dual homing (1:1), allowing ETX-202 to be connected to two different upstream devices.

PORT COMBINATIONS

ETX-202 offers flexible network and user port combinations:

- Ports 1 and 2 – Any Gigabit Ethernet fiber optic SFP or built-in 10/100/1000BaseT
- Ports 3–6 – Any Gigabit Ethernet fiber optic SFP or built-in 10/100/1000BaseT.

LAYER-2 LOOPBACK WITH MAC SWAPPING

Layer-2 link integrity can be tested by a non-disruptive loopback with MAC address swapping. When the loopback is activated, ETX-202 exchanges source and destination MAC addresses of the incoming packets. This loopback can be performed per VLAN (or EVC), it passes through Ethernet bridges and does not disrupt traffic flows that are not being tested.

FAULT PROPAGATION

The unit provides a user-configurable fault propagation mechanism. When a link failure is detected at the network port, ETX-202 optionally shuts down a user port until the network link is restored.

MANAGEMENT

The unit can be managed using the following ports and applications:

- Local management via an ASCII terminal connected to the RS-232 port
- Remote inband management via network ports. Remote management via Telnet or Web browser.

Management traffic can be separated from user data by creating a dedicated management VLAN.

Up to ten different stations can manage ETX-202 simultaneously, enabling monitoring the network status from different locations.

The following security protocols are provided by ETX-202 to ensure client-server communication privacy and correct user authentication:

- RADIUS (client authentication only)
- SSL for Web-based management
- SSH for Secure Shell Telnet session
- SNMPv3 for secure SNMP sessions.

REMOTE MONITORING

ETX-202 uses the Syslog protocol to generate and forward event notifications over IP networks.

ETX-202 supports DDM (Digital Data Management) SFPs according to SFF-8472 Version 9.3.

Specifications

NETWORK INTERFACE

Number of Ports

Up to 2 (redundancy)

Type

Fiber optic(SFP-based):

Gigabit Ethernet (1000BaseSx,
1000BaseLX10, 1000BaseBx10),

Copper: 10/100/1000BaseT

Connector

SFP slot or RJ-45

SFP Transceivers

For full details, see the SFP Transceivers data sheet at www.rad.com

USER INTERFACE

Number of Ports

Up to 4 (ports 3–6)

Type

Fiber optic (SFP-based):

Gigabit Ethernet (1000BaseSx,
1000BaseLX10, 1000BaseBx10),

Copper: 10/100/1000BaseT

Connector

SFP slot or RJ-45

SFP Transceivers

For full details, see the SFP Transceivers data sheet at www.rad.com

Note: It is strongly recommended to order this device with **original RAD SFPs installed**. This will ensure that prior to shipping, RAD has performed comprehensive functional quality tests on the entire assembled unit, including the SFP devices. RAD cannot guarantee full compliance to product specifications for units using non-RAD SFPs.

GENERAL

Certifications

MEF-9 EPL, MEF-14 EPL

Compliance

IEEE 802.3, 802.3u, 802.1D, 802.1Q,
802.1p, 802.1ag, 802.3ad, 802.3ah

Maximum Frame Size

4,096 bytes

MAC Address Table Size

8,192 entries

Management

- Out-of-band: via dedicated terminal port; V.24/RS-232 DCE; 9.6, 19.2, 115.2 kbps; DB-9 female connector
- Inband: via network or user ports

Power

AC/DC: 100–240 VAC or
48/60 VDC nominal (40–72 VDC)

WRDC: 24/48/60 VDC nominal
(18–72 VDC)

Power Consumption

9W max

Physical

ETX-202: Height: 43.7 mm (1.7 in)
Width: 215 mm (8.4 in)
Depth: 147 mm (5.8 in)
Weight: 0.7 kg (1.5 lb)

ETX-202/H: Height: 43.7 mm (1.7 in)
Width: 215 mm (8.4 in)
Depth: 300 mm (11.8 in)
Weight: 1.9 kg (4.2 lb)

Environment





Temperature:

ETX-202: 0 to 50°C (32 to 122°F)

ETX-202/H: -40 to 65°C (-40 to 149°F)

Humidity: Up to 90%, non-condensing

Table 1. ETX Family Comparison Table

Feature	ETX-102 (Ver. 3.8)	ETX-201 (Ver. 3.8)	ETX-202 (Ver. 3.8)	ETX-204A (Ver. 3.0B)
				
Network interface	2 × Fast Ethernet	Up to 2 × Gigabit or Fast Ethernet (auto-detect) One interface can be configured as user or network	2 × Gigabit Ethernet	Up to 2 × Gigabit or Fast Ethernet (auto-detect) One interface can be configured as user or network
User interface	Up to 4 × Fast Ethernet	1 × Gigabit or Fast Ethernet (if network interface configured as user interface) and up to 4 × Fast Ethernet	Up to 4 × Gigabit Ethernet	1 × Gigabit or Fast Ethernet (if one network interface is configured as user interface) and up to 4 × Gigabit Ethernet
Forwarding mode	VLAN-aware/unaware bridging, 8K MAC addresses (EPL)	VLAN-aware/unaware bridging, 8K MAC addresses (EPL)	VLAN-aware/unaware bridging, 8K MAC addresses (EPL)	Flow-based forwarding (EVPL)
QoS	Rate limitation Traffic classification (802.1p bits, ToS, DSCP, port-based)	Rate limitation Traffic classification (802.1p bits, ToS, DSCP, port-based)	Rate limitation Traffic classification (802.1p bits, ToS, DSCP, port-based)	Rate limitation per flow Traffic classification (Port-based, VLAN, 802.1p bits, ToS, DSCP) Shaping
BW profile	CIR/CBS per port	CIR/CBS per port	CIR/CBS per port	CIR/CBS, EIR/EBS per EVC.COS
Remote management	Telnet, Web	Telnet, Web	Telnet, Web	Telnet
Management interface	Menu-driven	Menu-driven	Menu-driven	Command line

ETX-202

Basic Ethernet Demarcation Device

Ordering

STANDARD CONFIGURATIONS

ETX-202/NULL/NULL/1NULLUTP

ETX-202/NULL/UTP/1UTP

ETX-202/NULL/NULL/4UTP

ETX-202/NULL/NULL/4NULL

ETX-202/UTP/UTP/4UTP

ETX-202/NULL/NULL/2NULL2UTP

SPECIAL CONFIGURATIONS

ETX-202/?/!/+/1+/2+/3

Legend

? Power supply (Default=AC/DC wide range power supply):

WRDC 24 to -48 VDC power supply

Note: The wide range DC power supply is available only for units with temperature-hardened enclosures.

! Temperature range (Default=Regular enclosure):

H Temperature-hardened enclosure

Note: The ETX-202/H version requires temperature-hardened SFP transceivers.

+1 Port 1 (network) interface:

NULL Empty SFP slot

UTP Built-in 10/100/1000BaseT

+2 Port 2 (network) interface: Refer to the network port 1 options

+3 Ports 3–6 (user) interface and combinations:

1UTP Port 3: 1 built-in 10/100/1000BaseT port (RJ-45 connector)

1NULL Port 3: empty SFP slot

1NullUTP Port 3: Empty SFP slot
Port 4: 1 built-in 10/100/1000BaseT port (RJ-45 connector)

2Null-2UTP Ports 3–4: Empty SFP slots
Ports 5–6: 2 built-in 10/100/1000BaseT ports (RJ-45 connector)

4UTP 4 built-in 10/100/1000BaseT ports (RJ-45 connector)

4NULL Ports 3–6: Empty SFP slots

Note: When you order an option containing NULL, you can use/order a RAD SFP in the corresponding slot.

SUPPLIED ACCESSORIES

AC power cord

DC power connection kit

OPTIONAL ACCESSORIES

RM-35/@

Hardware kit for mounting one or two ETX-202 units in a 19-inch rack

@ Rack mount kit (Default=Both kits):

P1 Kit for mounting one unit

P2 Kit for mounting two units

WM-35-TYPE4

Hardware kit for mounting one ETX-202 unit on a wall

CBL-DB9F-DB9M-STR

Control port cable

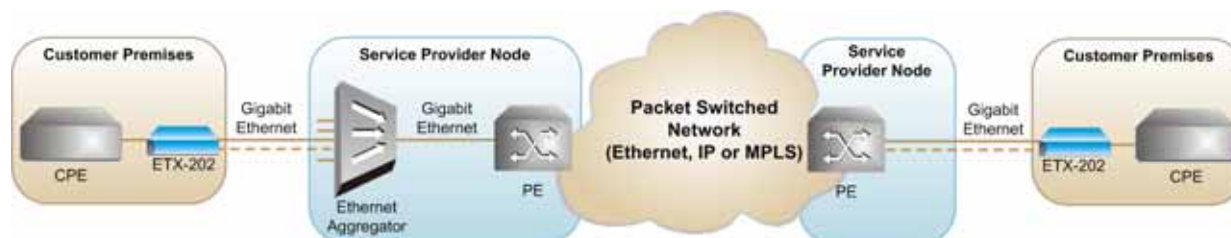


Figure 1. Providing Managed Ethernet Services over a PSN using ETX-202

International Headquarters
24 Raoul Wallenberg Street
Tel Aviv 69719, Israel
Tel. 972-3-6458181
Fax 972-3-6498250, 6474436
E-mail market@rad.com

CB
NETWORKS
<http://www.cbnetworks.fr>

12 avenue des prés
78059 St Quentin en Yvelines
Tel: 33 (0)1 77 55 03 00
Fax: 33 (0)1 30 44 11 95
E-mail: sales@cbnetworks.fr

RAD

data communications

The Access Company

www.rad.com

Order this publication by Catalog No. 8.3659